

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 May 2005 (19.05.2005)

PCT

(10) International Publication Number  
WO 2005/044707 A1

(51) International Patent Classification: B65H 29/50, 29/60, 29/66

(21) International Application Number:  
PCT/SE2004/001579

(22) International Filing Date:  
1 November 2004 (01.11.2004)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:  
0302942-8 5 November 2003 (05.11.2003) SE

(71) Applicant and

(72) Inventor: WALLSTEN, Sten [SE/SE]; Näsavägen 8,  
S-571 92 Nässjö (SE).


(74) Agent: AWAPATENT I LINKÖPING AB; Gjuterigatan  
9, S-553 18 Jönköping (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: STORAGE DEVICE

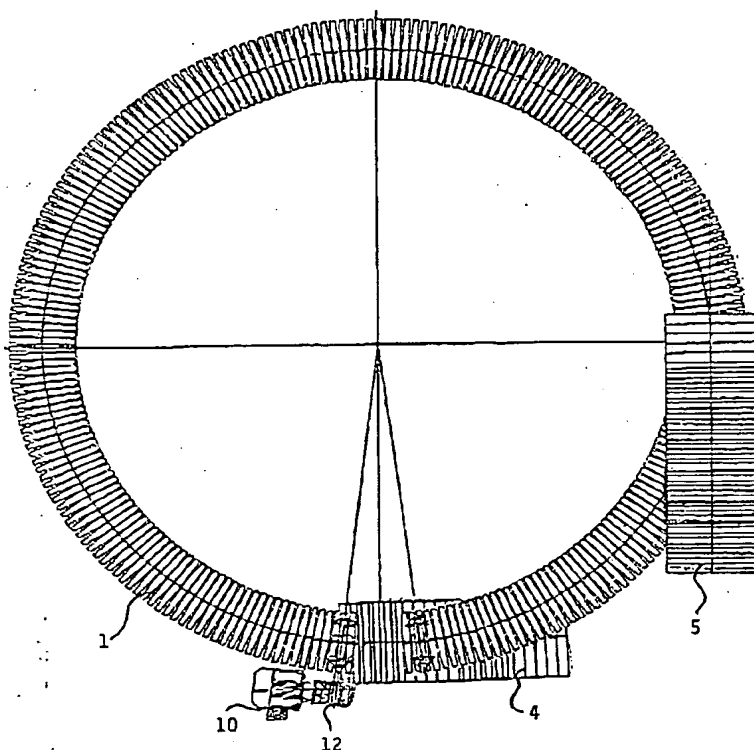

(57) Abstract: The present invention relates to an installation and a method for storing printed products in one or more layers. The installation and the method are characterised in that the printed products are stored on at least one substantially circular conveyor track (1). The track (1) on which the printed products are stored is provided with at least one opening (2) for discharging the lowermost layer.

WO 2005/044707 A1

WO 2005/044707 A1

|||||

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*